



29 rue du 14 juillet  
67980 - Hangenbieten  
FRANCE  
Tel. : +33 3 88 48 53 00  
[www.soframe.com](http://www.soframe.com)

DEFENCE



© SOFRAME - 11/2022 - D15376A-EN - This document is the exclusive property of our company. All descriptions and characteristics are given for information only and do not represent a commitment. Non contractual photos

# RP 3.5

## Multipurpose trailer






DEFENCE

EN

RP 3.5



# Technical characteristics

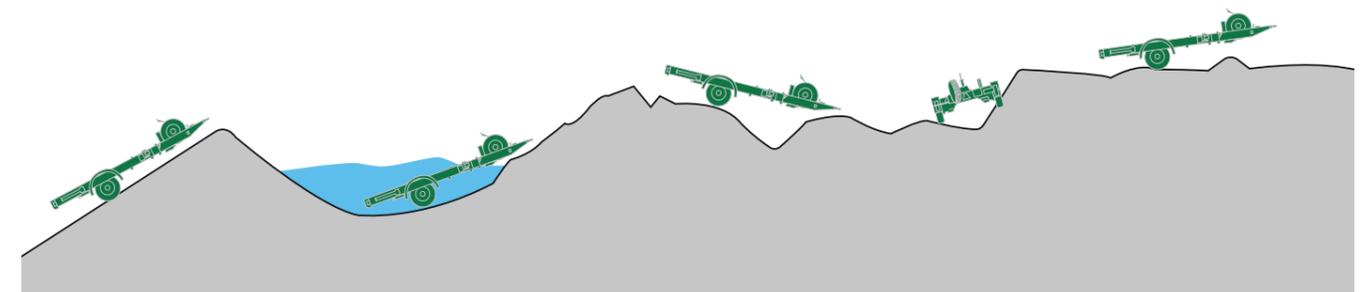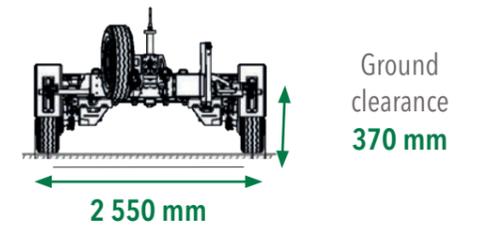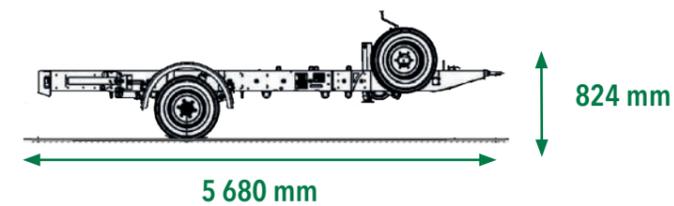

Slope

Fording

Trench

Side slope

Step

### Performance, versatility, robustness, durability and transportability are the key qualities of our trailers.

The RP 3.5 multi-purpose trailer embodies these characteristics.

It can be used to transport specific payloads within the dimensions of its base platform (3600 x 1400 mm) and up to the limit of its GVWR on roads and tracks.

It is composed of a welded high yield strength steel chassis and two landing legs for stabilisation.

This trailer also has running gear with two independent arms, pneumatic suspension, ABS, blackout, a jockey wheel and a spare wheel.



Payload: 2 400 kg



Tyres: 235/75 R 17.5



NATO type D76 towing ring



GVWR: 3.5 t



Electricity: 24 V  
Compliant with NATO standards



Suspension: Pneumatic

The RP 3.5 trailer can be transported by air, sea and rail.